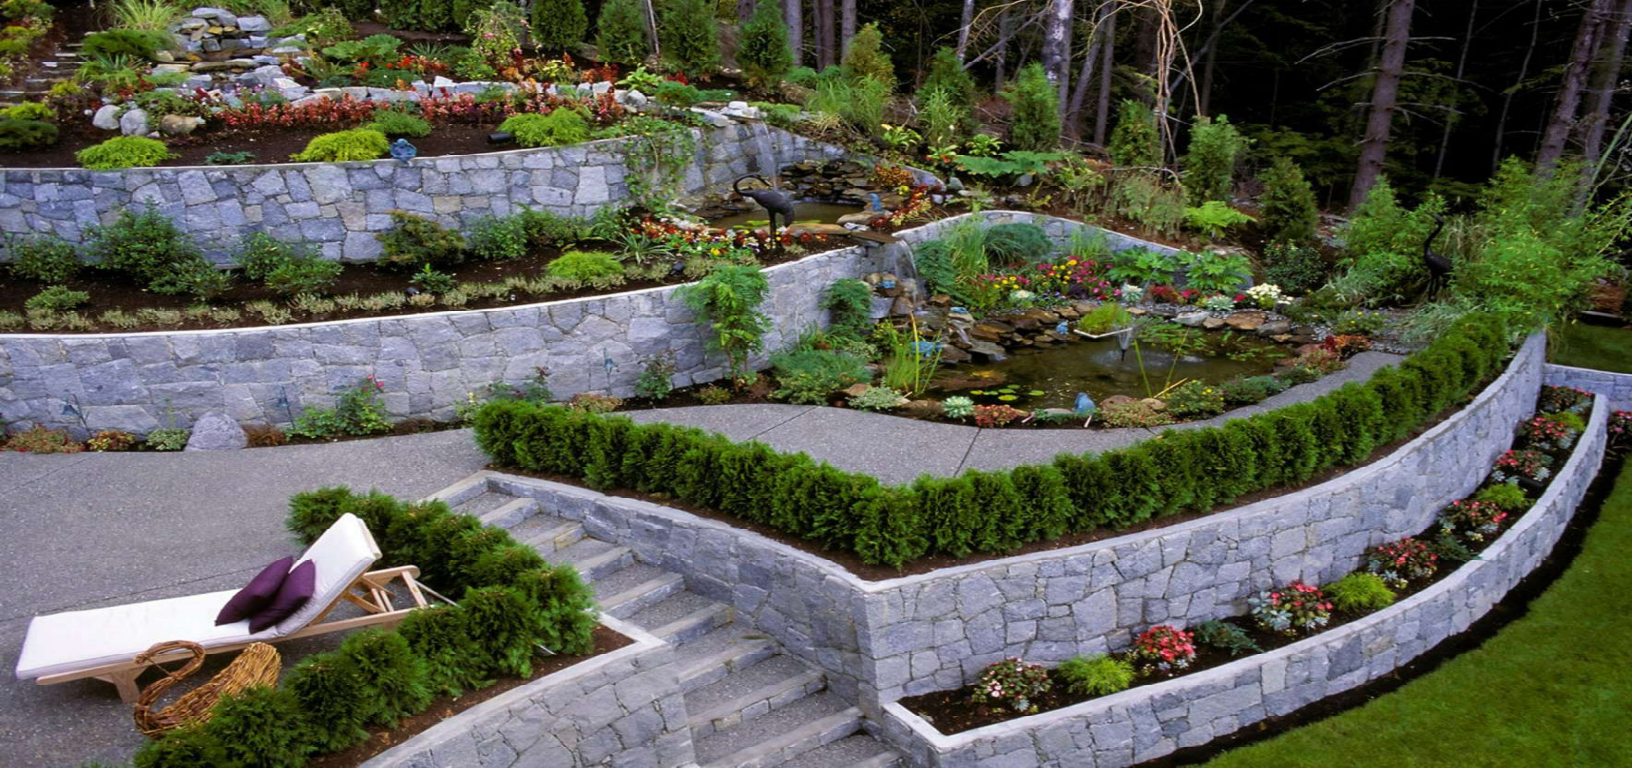

HYDRAWAY®
DRAINAGE SYSTEM

THE DRAINAGE SYSTEM OF CHOICE FOR
COMMERCIAL AND RESIDENTIAL LANDSCAPING.

Hydraway is an industry-leading, innovative technology designed for rapid dewatering and superior water management in diverse landscape applications.

Whether used beneath turf, behind retaining walls, under paver systems, or around planting beds, Hydraway Drainage offers superior water management, long-term durability, and protection against erosion. Its versatile design integrates seamlessly into a wide range of landscape features to create resilient, attractive, and functional outdoor environments.

Designed with durability and ease of use in mind, Hydraway supports healthier, more resilient landscapes over time.

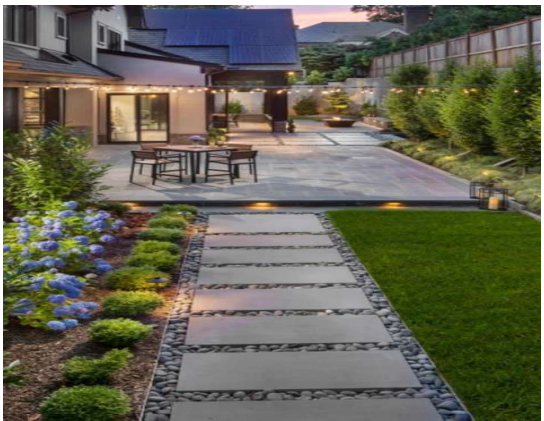

WHY CHOOSE HYDRAWAY?

UNIQUE INSTALLATION

In landscape design, drainage is critical. Not just for function, but for preserving the integrity and appearance of the space. Traditional perforated pipe systems often fall short, leading to clogs, standing water, and costly long-term damage.

Hydraway offers a proven alternative. Engineered specifically for high-performance landscape drainage, our system features a high flow, clog resistant design that integrates seamlessly into residential, commercial, and municipal environments. It installs quickly, requires minimal maintenance, and delivers unmatched reliability.

With decades of field-proven success and zero recorded failures when properly installed, Hydraway is the trusted choice for professionals who demand performance, durability, and peace of mind.

STRENGTH
Industry's highest compressive strength

IN-FLOW RATE
Industry's highest in-flow rate

LONG LIFE
Dependable, long-life performance

70% FASTER
Removes water 70% faster than traditional methods of drainage

LABOR SAVINGS
Ease of installation means lower total installed cost

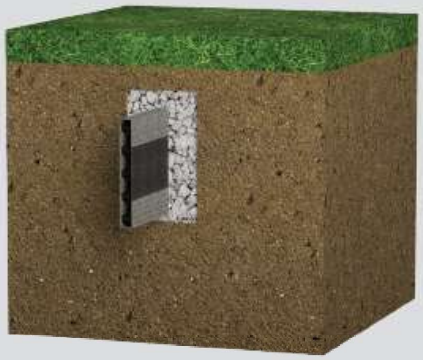

Property	Test Method	Unit of Measurement
GEOTEXTILE[1] - NEEDLE-PUNCTURED, NONWOVEN		
Elongation	ASTM D-4632-91	50%
Grab Tensile	ASTM D-4632-92	120 lbs
Flow Rate	ASTM D-4491	135 gal/mn/ft^2[3]
CORE - HDPE		
Compressive Strength	ASTM D-695/1621[4]	11,400 PSF
Flow Rate at 1,500 PSF	ASTM D-47162[2]	11 GPM/ft-width

1. 4 oz fabric
2. Gradient of 0.01
3. Values shown are in weaker principal direction. Minimum average roll values are calculated as the typical minus two standard deviations. Statistically, it yields a 97.7% degree of confidence that nay samples taken from quality assurance testing will exceed the value reported.
4. Modification was made to an existing ASTM test since a recognized test method had not been established for this type of product at time of testing.

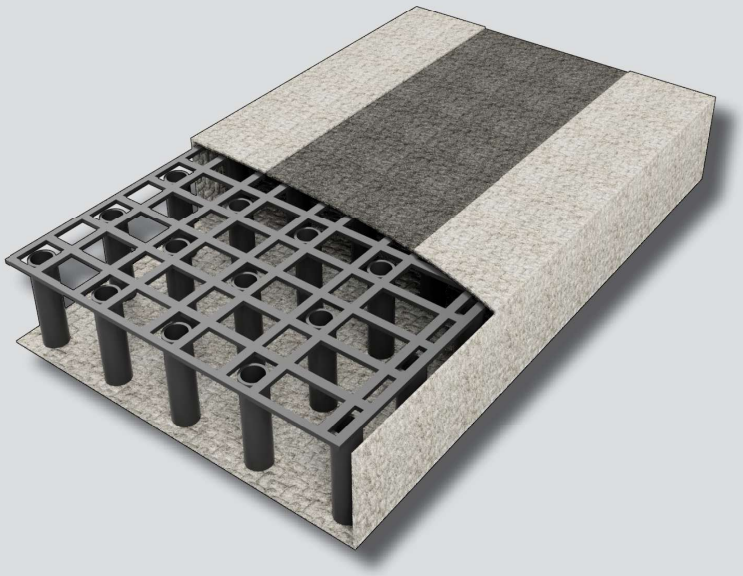

© 2025 INTECH ANCHORING

HYDRAWAY.NET | INFO@HYDRAWAY.NET | 800.223.7015